





SINGLE BAG/CARTRIDGE Model 275 - 279

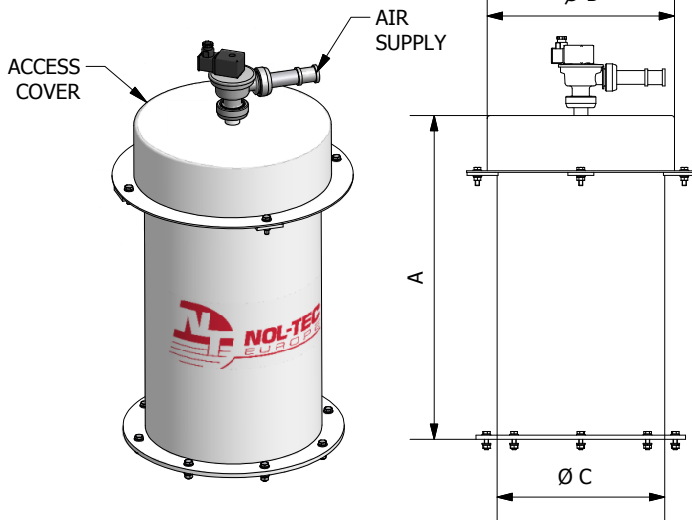

Model No.	A [mm]	Filter Area [m ²]	Type	B [mm]	C [mm]
279-225	635	0,20	Bag	305	229
279-450	1092	0,42	Bag	305	229
279-3000	635	2,3	Cart.	305	229
275-5000	698,5	4,6	Cart.	432	356
317-9000	838,2	8,4	Cart.	-	-


SINGLE CARTRIDGE Model 317

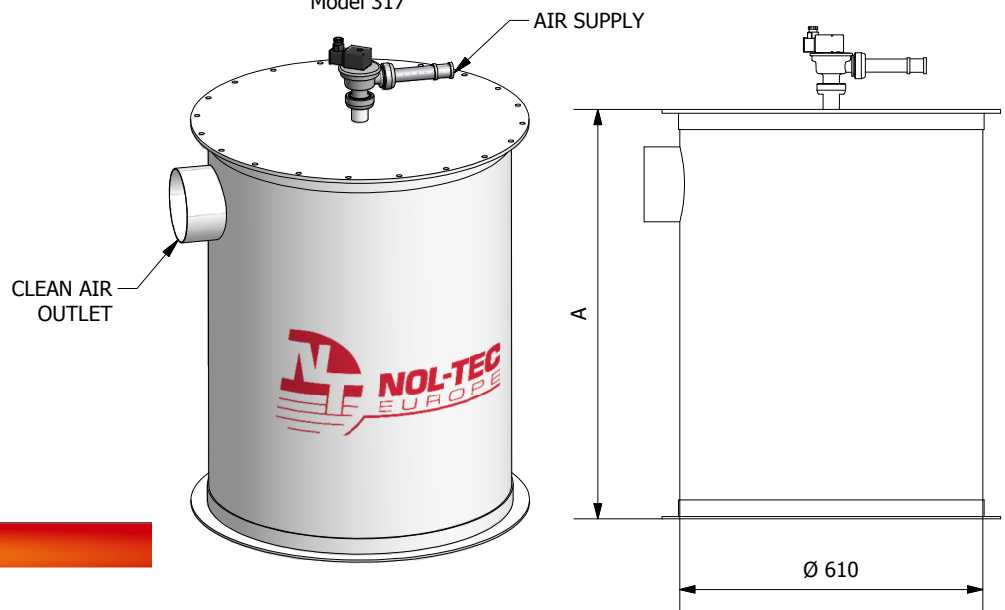

STANDARD FEATURES

- Reverse jet cleaning;
- 100% material recovery;
- Quick access;
- Top filter element removal (Model 279);
- Bottom filter element removal (Model 317).

OPTIONAL FEATURES

- Variety of filter materials;
- Stainless construction AISI 304/316;
- ATEX design 94/9/CE; 
- Epoxy coatings;
- Cleaning system at high efficiency.

SPECIFICATIONS

- Air:
 - clean and dry at correct pressure dew point;
 - 6,5 bar minimum;
- Electrical: 24 Vcc, 50/60 Hz
(OPTION 230 Vac, 115 Vac, 50/60 Hz).
- Temperature range: -10 °C to 120 °C (Process side)

THE **NOL-TEC** SINGLE BAG/CARTRIDGE DUST FILTERS ARE AN EFFECTIVE METHOD OF FILTERING DUST GENERATED IN HOPPER FILLING APPLICATIONS.