
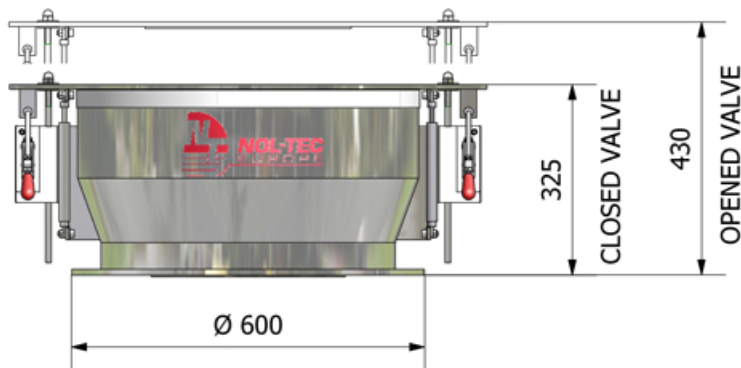
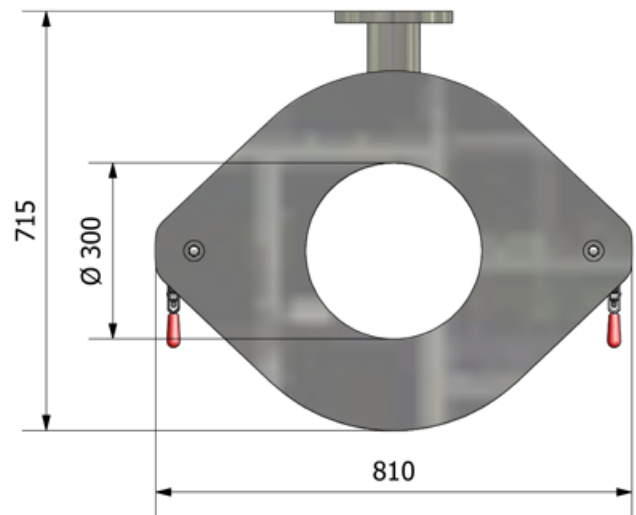



BULK BAG TENSIONING VALVE Model 501

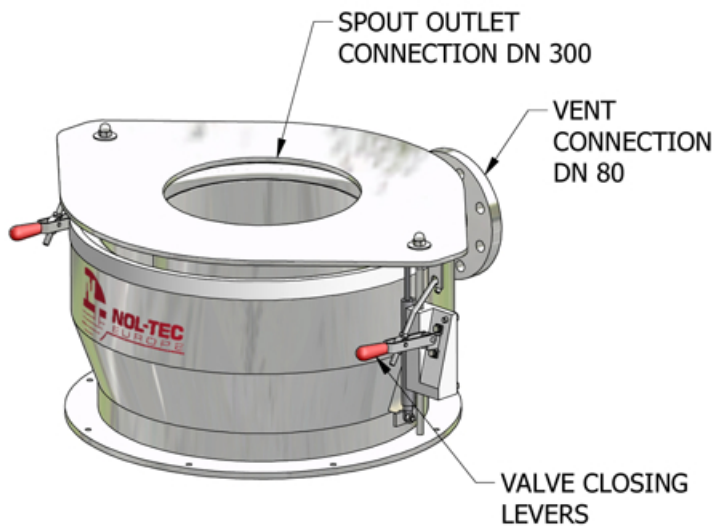

STANDARD FEATURES

- Stainless steel construction AISI 304
- Dust-free docking
- Reliable discharge
- Easy handling
- Individual use
- Machines directive design 2006/42/CE
- GMP design


OPTIONAL FEATURES

- Stainless steel construction AISI 316
- ATEX design 94/9/CE - 20/21, 20/22 
- Pneumatic tensioning system for spout bulk bag

SPECIFICATIONS

- Working temperature: from -10 °C to 70 °C

PNEUMATIC TENSIONING SYSTEM FOR DISCHARGE BULK BAG (OPTION)

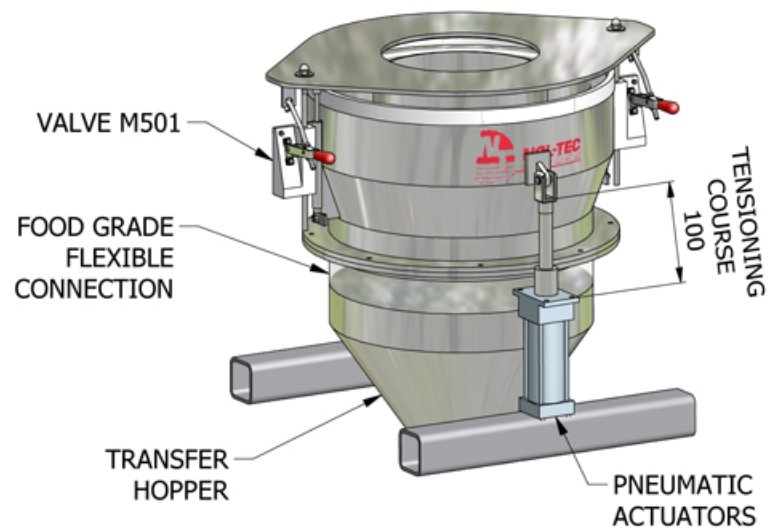

The self-tensioning valve **NOL-TEC** allows a simple but effective system of bulk bag discharge completely "DUST FREE", particularly suitable for use in the pharmaceutical and food industries.