


### STANDARD FEATURES


- Twelve air injection valve assemblies
- Ceramic valve seat directs air into the material at various angles
- Abrasion resistant, urethane valve seal
- Non-restrictive discharge valve with positive position indicator
- Wear parts are replaceable without removal of blending cone

### OPTIONAL FEATURES

- Individual air injection solenoid valves for sequential valve actuation
- Interior coatings
- Stainless steel construction
- ATEX design 94/9/CE 
- Special mounting flange
- Sanitary design
- High temperature design

### SPECIFICATIONS

- Weight: 476 Kg
- Air
  - Control Air: clean and dry at correct pressure dew point
  - 5,5 Bar minimum
- Temperature: 90°C max.

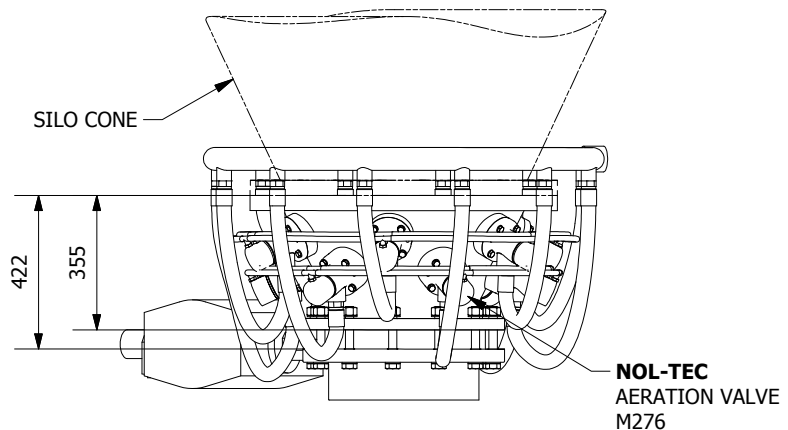

THE **NOL-TEC** BLENDING CONE IS DESIGNED TO HOMOGENEOUSLY BLEND DRY MATERIALS IN STORAGE SILO.

#### MAIN FEATURES:

- QUICK, CLEAN AND EFFICIENT BLENDING
- SIMPLIFIED AND LOW MAINTENANCE